




Technical data

HIGH PERFORMANCE EDGER OPTIMIZER TECHNOLOGY OPTIDRIVE | REMOTE-CONTROLLED

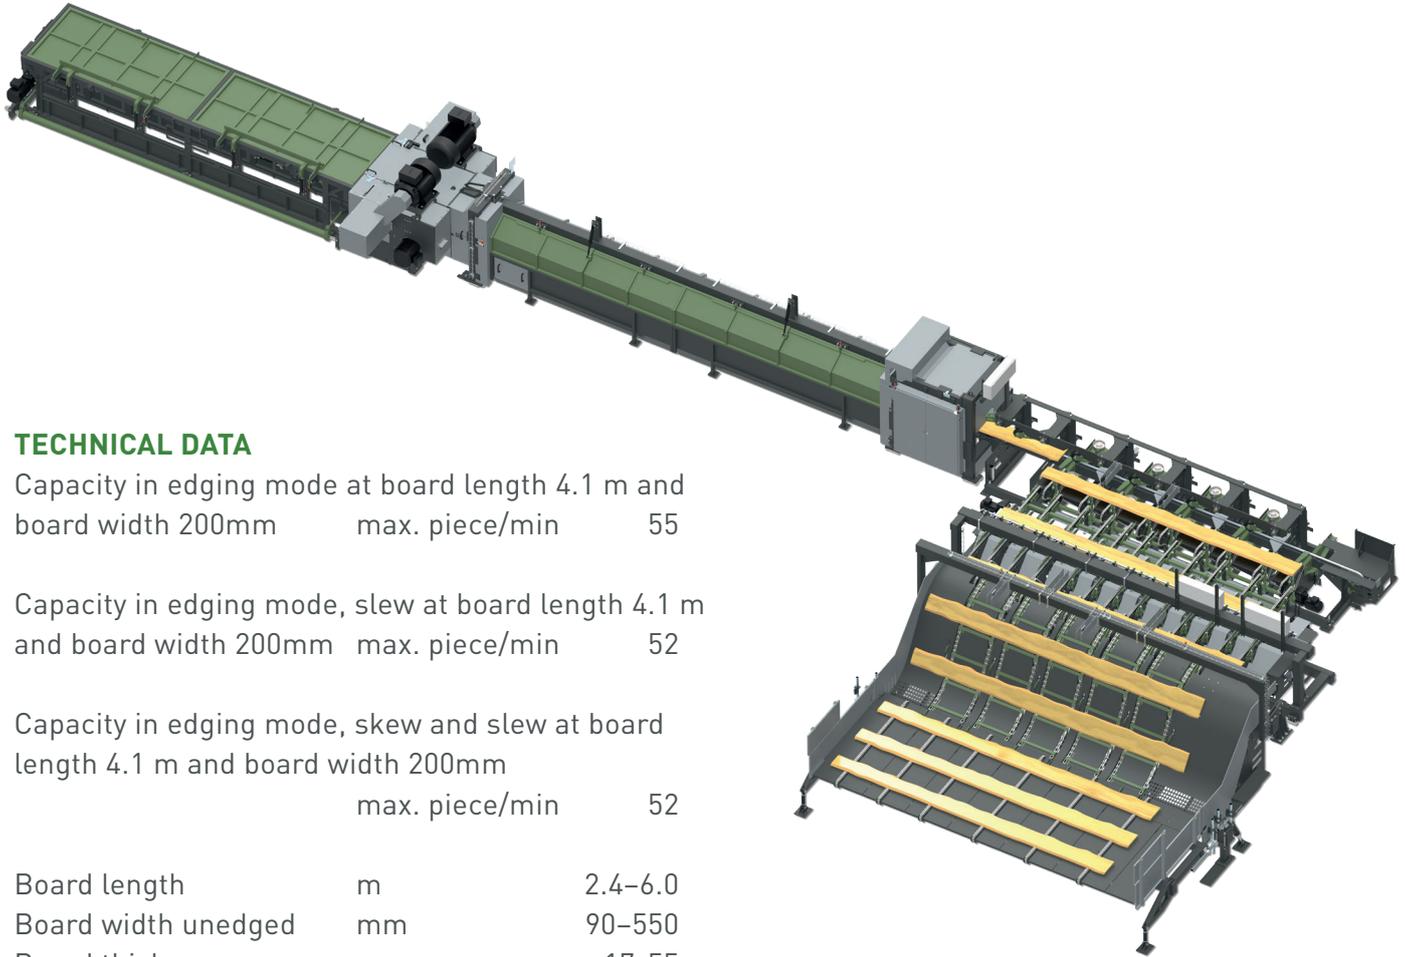

TECHNICAL DATA

Capacity in edging mode at board length 4.1 m and board width 200mm max. piece/min 55

Capacity in edging mode, slew at board length 4.1 m and board width 200mm max. piece/min 52

Capacity in edging mode, skew and slew at board length 4.1 m and board width 200mm
max. piece/min 52

Board length	m	2.4–6.0
Board width unedged	mm	90–550
Board thickness	mm	17–55
Automated		remote-controlled

TECHNICAL DATA BKO

Feed speed max.	m/min	420
Saw arbors drive	kW	2 x 75–132
Weight with drive motors approx.	t	5.8

TECHNICAL DATA TAE PIVOTABLE

Feed speed max.	m/min	420
Saw arbors drive	kW	2 x 55–110
Weight with drive motors approx.	t	5.4

As a result of constant improvement and further development of our designs, the information and illustrations in this brochure are not binding.